



Manufactured in Gauteng for over 35 years, **Transit Floor Coverings** is proud to be one of South Africa longest-standing flooring producers.

## UNIQUE

Made from 100% virgin PVC according to a unique formulation, Transit Tiles are engineered to offer:

- ✓ Exceptional durability
- ✓ Superior chemical & abrasion resistance
- ✓ Anti-static & Anti-slip
- ✓ Impervious to most oils and acids
- ✓ Easy to clean
- ✓ Quiet, comfortable & warm underfoot
- ✓ Fully recyclable
- ✓ Easy to install with minimal wastage
- ✓ 6 different designs
- ✓ 11 standard colours
- ✓ Electro-static dissipative / Conductive tiles also available
- ✓ Custom colouring available for orders in excess of 300m<sup>2</sup>

Transit floor tiles are the ideal heavy-traffic flooring solution for commercial, educational, government, industrial and domestic applications.

## DIMENSIONS OF STUD DESIGNS

1. 'THE 8 x 8' – 8 rows of 8 round studs, each 26mm in diameter with a polished radius.  
300mm x 300mm x 3.2mm (base 2.2mm, 1.0mm stud height).
2. RONDA - 10 rows of 10 round studs, each 25mm in diameter.  
300mm x 300mm x 3mm (base 2.0mm, 1.0mm stud height).
3. MATRIX – 12 rows of 12 small 18mm squares.  
300mm x 300mm x 3.2mm (base 2.70mm, 0.5mm stud height).
4. QUADRA SUPER – 6 rows of 6 big 40mm squares, with rounded corners and polished radius.  
300mm x 300mm x 3mm (base 2.0mm, 1.0mm stud height).
5. QUADRA – 6 rows of 6 big 44mm squares.  
300mm x 300mm x 3mm (base 2.5mm, 0.5mm stud height).
6. JUMBO – Leather-grain surface with 0.5mm wide bevelled recess around the edge to imitate ceramic tile grouting.  
Looks like a ceramic tile but will not chip, crack or break.  
Trolleys and pallet-jacks can easily move over the Jumbo tile.  
Total thickness 3mm.

One box of tiles = 25 tiles = 2.25M<sup>2</sup> = 8kg.

Dimensions of box = 310mm x 310mm x 95mm.

## RECOMMENDED TILE ADHESIVE

Normal traffic areas – QUALICHEM QAR 190A, PEKAY D91 acrylic.  
Heavy traffic areas – QUALICHEM QAN 400, PEKAY V440 contact.  
Wet areas or areas where heavy forklifts are used, car showrooms as well as areas where heat is caused due to plate glass windows etc. Two-part polyurethane QUALICHEM QAR290C, PEKAY A660.

## RECOMMENDED TRANSIT TREAD ADHESIVE

PEKAY V440 CONTACT. QUALICHEM QAN 400A CONTACT.




## TRANSIT TREAD

The Transit Tread and Riser offers architects the perfect solution to the problem of stair finishing to all standard concrete, wooden or steel structure staircases.

One box tread = 12 tiles = 3.6 lin.metre

Dimensions of box = 310 x 560 x 65mm

Weight = 9kg.

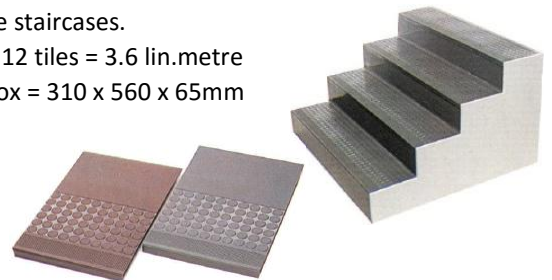

## ADVANTAGES OF TRANSIT TREAD

Tread, nosing and riser in once piece.

- ✓ No aluminium nosing or plastic insert to come loose.
- ✓ Hard wearing and non-slip.
- ✓ Simple and quick installation.
- ✓ Suitable for new or renovation projects.
- ✓ Can be installed on stair with open riser.
- ✓ Available in 4 different stud designs and 10 colours to match Transit Ronda, Matrix, Quadra Super, Quadra floor tiles.
- ✓ Factory technical support available.
- ✓ Stair may be fitted with margins of differing colour to centre.
- ✓ Designed and made in South Africa.